

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) EP 0 855 805 A2

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
29.07.1998 Bulletin 1998/31

(51) Int. Cl.<sup>6</sup>: H04B 1/66

(21) Application number: 97310098.5

(22) Date of filing: 15.12.1997

(84) Designated Contracting States:  
AT BE CH DE DK ES FI FR GB GR IE IT LI LU MC  
NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

(72) Inventor: Fujii, Osamu  
Higashihiroshima-shi, Hiroshima 739-01 (JP)

(74) Representative:  
Jenkins, Richard Gray et al  
R.G.C. Jenkins & Co.  
26 Caxton Street  
London SW1H 0RJ (GB)

(30) Priority: 22.01.1997 JP 9605/97


(71) Applicant:  
SHARP KABUSHIKI KAISHA  
Osaka-shi, Osaka-fu 545 (JP)

### (54) Method of encoding digital audio signals

(57) The method of encoding digital data in the present invention enables change of minimum limit of audibility characteristics and/or masking characteristics, which are usually set on the basis of the aural-psychological characteristics of persons with typical hearing,

thus changing the allocation of quantized bits to each frequency band and allowing selection of a sound quality which accords with the listener's hearing. The present invention is suitable for ATRAC, a method for compressed encoding for mini-discs.

FIG.1

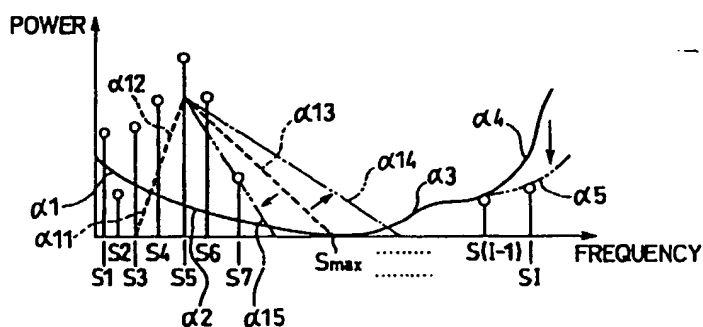

EP 0 855 805 A2

BEST AVAILABLE COPY

## Description

### FIELD OF THE INVENTION

The present invention relates to a method of encoding digital data in which, when recording musical tones, sounds, etc. in recording media such as mini-discs, bits are allocated to the spectrum of each frequency band in response to the musical tones, sounds, etc. so as to compress data volume.

### BACKGROUND OF THE INVENTION

One method of highly efficient compressed encoding of digital data such as musical tones and sounds is ATRAC (Adaptive Transform Acoustic Coding), used in mini discs. In ATRAC, since the digital data is compressed with high efficiency, it is first broken down into a plurality of frequency bands, then divided into blocks in accordance with time units of variable length, transformed into spectral signals by MDCT (Modified Discrete Cosine Transform) processing, and then each spectral signal is encoded by the number of quantized bits which have been allocated to it, taking into account aural-psychological characteristics.

Among the aural-psychological characteristics which can be applied to the compressed encoding are loudness-level characteristics and masking effect. Loudness-level characteristics show that, even with the same sound pressure level, the loudness of a sound sensed by a person changes according to the frequency of the sound. Accordingly, this shows that the minimum limit of audibility, which shows the smallest loudness which can be heard by a person, changes according to the frequency. As for masking effect, there are two kinds: simultaneous masking effect and elapsed masking effect. Simultaneous masking effect is a phenomenon in which, when several sounds of different frequency composition occur simultaneously, one sound makes another difficult to hear. Elapsed masking effect is a phenomenon in which the masking occurs before and after a loud sound along the time axis of the loud sound.

An example of conventional art which makes use of the elapsed masking effect is Japanese Unexamined Patent Publication No. 5-91061/1993. In this conventional art, when a transient signal is included in one of the frequency conversion time units, bits are allocated in accordance with a word length which varies depending on the energy of previous time units and on the amount of masking, thereby preventing a sound quality deterioration called "pre-echo." Again, Japanese Unexamined Patent Publication No. 5-248972/1993 proposes a technique for improving the efficiency of encoding by using elapsed masking in reference to the spectral distribution of previous time units.

Another example of bit allocation using the aural-psychological characteristics is one called the repetition

method, in which actual bit allocation suited to input digital data is performed as follows. First, the power  $S$  of each frequency band, and the masking threshold  $M$  of that power  $S$  on the other frequency bands, are found. Next, from the masking threshold  $M$  and the power of quantized noise  $N(n)$  (when each frequency band is quantized into  $n$  bits), is calculated the ratio of the masking threshold to noise, being  $MNR(n) = M/N(n)$ . Then, after bit allocation for the frequency band with the smallest ratio of masking threshold to noise  $MNR(n)$ , that ratio of masking threshold to noise  $MNR(n)$  is re-calculated, and bits are allocated to the frequency band with the lowest ratio.

Note that the aural characteristics of persons with typical aural characteristics are the model for the minimum limit of audibility, masking threshold, etc. mentioned above. Accordingly, there are cases where listeners will feel a sense of incongruity due to differences in hearing or preference.

For example, in cases where the spectral composition of the input digital data is comparatively flat, like white noise, bit allocation will be made with the masking threshold at the minimum limit of audibility, so most of the quantized bits will be allocated to the mid- to low-range. Accordingly, depending on the size of the spectral composition, quantized bits may not be allocated to the ultra-low and ultra-high ranges, giving some listeners a sense of incongruity.

Again, when the input digital data is a composite wave composed of a signal with a narrow spectrum band (such as a sine wave signal) and white noise, the frequency bands  $f_1$  which include the sine wave signal will have more power, but as for frequency bands  $f_2$  which are far from the frequency bands  $f_1$ , the farther from the frequency bands  $f_1$ , the greater the drop in power. Accordingly, there will be almost no masking from the sine wave signal at a frequency band  $f_2$ , and the influence of masking from the power of the frequency band  $f_2$  itself is increased. Because of this, there will be no great difference between the ratio of signal to masking threshold (SMR: the ratio of a frequency band's own power  $S$  to masking threshold  $M$ ) at the frequency bands  $f_1$  and the same ratio SMR at the frequency bands  $f_2$ .

In other words, if the power of a signal is  $S$ , and the power of quantized noise is  $N(n)$  when each frequency band is quantized into  $n$  bits, then, based on the relative relationship between the two, the ratio of masking threshold to noise  $MNR(n) = M/N(n) = S/N(n)/(S/M(n))$  will be approximately the same value at the frequency bands  $f_1$  and  $f_2$ . Accordingly, since the conventional adaptive bit allocation methods perform bit allocation based only on the ratio of masking threshold to noise  $MNR(n)$ , their drawback is that approximately the same number of bits are allocated to the frequency bands  $f_1$  and  $f_2$ .

As a result, if there are many frequency bands  $f_2$  which are not influenced by the masking from the sine

wave signal, the number of bits allocated to the frequency bands f1 which include the sine wave signal becomes relatively smaller, the quantization error of the sine wave signal becomes greater, and sound quality deteriorates.

In regard to this point, the present Applicant has proposed, in Japanese Unexamined Patent Publication 7-202823/1995, a structure which automatically limits the number of bits which may be allocated to frequency bands with low power S. However, a drawback of this conventional art is that, since the maximum number of bits which may be allocated to each frequency band is determined on the basis of its power, when the power of white noise is large, there are cases when no limitation on bit allocation to that frequency band is made.

### SUMMARY OF THE INVENTION

One object of the present invention is to provide a method of encoding digital data capable of attaining a sound quality which accords with the listener's hearing.

Another object of the present invention is to provide a method of encoding digital data capable of preventing deterioration of sound quality even of signals with narrow spectrum bands.

In order to realize the first object mentioned above, the first method of encoding digital data of the present invention encodes digital data such as musical tones and sounds by converting it into frequency domains, dividing the converted spectra into a plurality of frequency bands, changing a minimum limit of audibility characteristic so as to set a masking threshold, and allocating quantized bits for each frequency band in accordance with ratios of masking threshold to noise which are found for each frequency band in accordance with power or energy of each frequency band in consideration of aural-psychological characteristics.

The above structure, by enabling change of the minimum limit of audibility characteristic among aural-psychological characteristics, frees aural-psychological characteristics from definition by the characteristics of persons with typical hearing, and makes possible selection of whether or not to allocate bits to spectra with small inaudible domains, or spectra with ultra-low or ultra-high domains. Accordingly, it becomes possible to respond to persons with superior hearing or to individual, subjective preference, and sound quality which accords with listeners' hearing can be attained.

Next, in order to realize the first object mentioned above, the second method of encoding digital data of the present invention encodes digital data such as musical tones and sounds by converting it into frequency domains, dividing the converted spectra into a plurality of frequency bands, changing a masking characteristic so as to set a masking threshold, and allocating quantized bits for each frequency band in accordance with ratios of the masking threshold to noise for each frequency band which are found in accordance with power

or energy of each frequency band in consideration of aural-psychological characteristics.

The above structure, by enabling change of the masking characteristic among the aural-psychological characteristics, frees aural-psychological characteristics from definition by the characteristics of persons with typical hearing, and makes possible selection of whether to allocate bits, for example, to spectra which, for example, suffer masking in a critical band. Accordingly, it becomes possible to respond to persons with superior hearing or to individual, subjective preference, and sound quality which accords with listeners' hearing can be attained.

Next, in order to realize the first object mentioned above, the third method of encoding digital data of the present invention encodes digital data such as musical tones and sounds by converting it into frequency domains, dividing the converted spectra into a plurality of frequency bands, and switching among (i) bit allocation in accordance with ratios of masking threshold to noise which are found for each frequency band in accordance with power or energy of each frequency band in consideration of aural-psychological characteristics, (ii) bit allocation in accordance with a representative value of the power or the energy of each frequency band, and (iii) bit allocation giving weight to each of the foregoing bit allocation methods.

With respect to data, such as white noise having a spectral composition which is comparatively flat, the above structure makes possible bit allocation which is flat along the frequency axis. Again, with respect to data, such as sine wave signals, with narrow band width, the above structure makes possible bit allocation which emphasizes the signal with narrow band width. Accordingly, selection of a sound quality which is suited to the source of the musical tone is made possible.

Finally, the fourth method of encoding digital data of the present invention, in order to realize the second object mentioned above, switches among bit allocation methods (i), (ii), and (iii) described in the third method of encoding digital data in accordance with a relationship between the masking threshold and peaks and local peaks found based on differences in power or energy between adjacent spectra within each frequency band.

The above structure makes it possible to automatically allocate bits according to the method most suited to the digital data, whether it is white noise or other data with wide band width, or sine wave signals or other data with narrow band width, thus preventing deterioration of sound quality, even with musical tones not suited to bit allocation using simultaneous masking such as the masking threshold/noise ratio.

The other objects, features, and superior points of the present invention will be made clear by the description below. Further, the advantages of this invention will be evident from the following explanation in reference to the Figures.

## BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a frequency spectrum diagram for explaining the method of encoding according to the first embodiment of the present invention.

Figure 2 is a block diagram showing the electrical structure of a mini-disc recording and reproduction device, which is one example of application of the present invention.

Figure 3 is a flow-chart for explaining the bit-allocation method according to the first embodiment of the present invention.

Figure 4 is a flow-chart for explaining the bit-allocation method according to the second embodiment of the present invention.

Figure 5 is a flow-chart for explaining the bit-allocation method according to the third embodiment of the present invention.

Figure 6 is a frequency spectrum diagram for explaining operations for detection of peaks and local peaks in the bit-allocation method shown in Figure 5.

## DESCRIPTION OF THE EMBODIMENTS

The first embodiment of the present invention will be explained below, in reference to Figures 1 through 3.

Figure 1 is a frequency spectrum diagram for explaining the method of encoding digital data according to the first embodiment of the present invention, and Figure 2 is a block diagram showing the electrical structure of a mini-disc recording and reproduction device 1, which is one example of application of the present invention. First, in reference to Figure 2, the mini-disc recording and reproduction device 1 will be explained. First, digital data, for example in the form of light signals, is serially inputted to an input terminal 2 from a digital audio signal source (not shown) such as a compact disc reproduction device or a satellite broadcast receiver. After the light signals are converted into electric signals by a photoelectric element 3, they are sent to a digital PLL circuit 4. The digital PLL circuit 4 extracts the clock from the digital data, and recreates multibit data corresponding to the sampling frequency and the number of quantized bits. Next, in a frequency conversion circuit 5, the multibit data undergoes sampling rate conversion to the 44.1 kHz conforming to the mini-disc standard from, for example, the 44.1 kHz sampling frequency of compact discs, the 48 kHz sampling frequency of digital audio tape recorders, or the 32 kHz sampling frequency of satellite broadcasts (A mode), and is then sent to an audio compression circuit 6.

The audio compression circuit 6 performs compressed encoding of the input data according to the foregoing ATRAC method. The encoded audio data is sent through a shock-proof memory controller 7 to a signal processing circuit 8. A shock-proof memory 9 is provided in association with the shock-proof memory controller 7. In addition to absorbing the difference in

transfer rates between the audio data outputted from the audio compression circuit 6 and the audio data inputted to the signal processing circuit 8, the shock-proof memory 7 also serves to protect the audio data by interpolation of any breaks which occur in the playback signal due to disturbance such as vibration during the playback operation, which will be discussed below.

The signal processing circuit 8 functions as an encoder and decoder, and encodes the audio data as magnetic modulation signals before sending it to a head driving circuit 11. The head driving circuit 11 moves a recording head 12 to the desired recording location on a magneto-optical disc 13, and causes the recording head 12 to emit a magnetic field corresponding to the magnetic modulation signals. At this time, laser light is projected from an optical pickup 21 onto the desired recording location on the magneto-optical disc 13, and a magnetized pattern corresponding to the magnetic field emitted by the recording head 12 is formed on the magneto-optical disc 13.

During the playback operation, on the other hand, serial signals corresponding to the magnetized pattern on the magneto-optical disc 13 are reproduced by the optical pickup 21, and after the serial signals thus reproduced are amplified by a high-frequency (RF) amplifier 22, they are sent to the signal processing circuit 8 and decoded into audio data. After the shock-proof memory controller 7 and the shock-proof memory 9 have eliminated the influence of any disturbance on the decoded audio data, they are sent to an audio expansion circuit 23. The audio expansion circuit 23 performs a conversion process which is the reverse of compressed encoding according to the ATRAC method, and demodulates the audio data into full-bit digital audio signals. The demodulated digital audio signals are converted into analog audio signals by a digital/analog (D/A) conversion circuit 24, and are then outputted from an output terminal 25.

The serial signals amplified by the high-frequency amplifier 22 are also sent to a servo circuit 31. In response to the serial signals which have been reproduced, the servo circuit 31 exerts feedback control on the revolution speed of a spin motor 33 through a driver circuit 32, thus enabling reproduction at the desired linear velocity. The servo circuit 31 also exerts feedback control on the revolution speed of a feed motor 34, thus enabling control of the position of the optical pickup 21 in the radial direction of the magneto-optical disc 13, i.e., control of tracking. Finally, the servo circuit 31 also exerts feedback control on the focusing of the optical pickup 21.

The servo circuit 31, the optical pickup 21, the high-frequency amplifier 22, the signal processing circuit 8, and the driver circuit 32 are energized by a power ON/OFF circuit 35. The power ON/OFF operations of the power ON/OFF circuit 35 and the signal processing operations of the signal processing circuit, which will be discussed below, are centrally managed by a system

control microcomputer 36. In association with the system control microcomputer 36 is provided an input operation means, which enables sound-quality selection operations, which will be discussed below, as well as song title input, song selection operations, etc.

Next, the bit allocation method in the first embodiment of the present invention, which is performed according to the ATRAC method by the audio compression circuit 6 of the mini-disc recording and reproduction device 1 structured as described above, will be explained, referring to Figures 1 and 3.

In the ATRAC method, the audio data sampled at 44.1 kHz, as mentioned above, is divided into certain frequency bands, specifically a Low frequency band from 0 kHz to 5.5 kHz, a Middle frequency band from 5.5 kHz to 11 kHz, and a High frequency band from 11 kHz to 22 kHz, and the audio data bridging certain time frames for each divided frequency band is converted, by means of the MDCT processing, into an MDCT coefficient, which is the data of one frequency domain. The MDCT coefficients converted in this manner are then converted into spectrum powers  $S_i$  for  $i$  number of frequency bands ( $i = 1, 2, \dots, I$ , with  $I$  equal to, for example, 25). Processing like that shown in Figure 3 is then carried out to allocate quantized bits in accordance with each spectrum power  $S_i$  thus obtained.

The audio compression circuit 6 includes a table ROM 6a, and in the table ROM 6a are stored masking characteristics and/or minimum limit of audibility characteristics according to the ATRAC method. These minimum limit of audibility characteristics appear as a curve shown by reference symbols  $\alpha 1$ ,  $\alpha 2$ ,  $\alpha 3$ , and  $\alpha 4$  on Figure 1. The masking characteristics, calculated in accordance with the spectrum powers  $S_i$ , a critical band width of each frequency band, etc., appear, for a power distribution like that shown in Figure 1, for example, as a curve shown by reference symbols  $\alpha 11$ ,  $\alpha 12$ , and  $\alpha 13$ . The minimum limit of audibility characteristics shown by the reference symbols  $\alpha 1$  through  $\alpha 4$  and masking characteristics shown by reference symbols  $\alpha 11$  through  $\alpha 13$  are prepared in accordance with the aural-psychological characteristics of persons with typical hearing characteristics, and are fixed characteristics.

However, in the first embodiment of the present invention, the minimum limit of audibility and/or the masking characteristics can be changed. In concrete terms, for example in the case of the masking characteristics, the greater the spectrum power and the higher the frequency, the larger the range of masking of other frequency bands. In the example in Figure 1, the maximum limit  $S_{max}$  of the range influenced by spectrum power  $S_5$ , which is a peak power, is shown by  $\alpha 13 \times (1 \pm \Sigma k)$ . Here,  $\Sigma k$  is a coefficient for weighting. If a plurality of variables  $k$  are stored in advance in the table ROM 6a, and the variables  $k$  are switched by means of a register 36a in the system control microcomputer 36, the masking characteristic curve  $\alpha 13$  can be

changed within the range from  $\alpha 14$  through  $\alpha 15$ . The variable  $k$  can be set by the listener through the input operating means 37.

For example, by changing the masking characteristic curve from  $\alpha 13$  to  $\alpha 14$ , the band masked is widened, the level of masking is increased, and the number of bits allocated to signals with low power is decreased, or even eliminated. Accordingly, bit allocation to signals of relatively greater power is increased, and the dynamic range of the high-power signals is increased. If, on the other hand, the masking characteristic curve is changed from  $\alpha 13$  to  $\alpha 15$ , bit allocation to low-power signals is increased, and bit allocation to signals of relatively greater power is decreased. Accordingly, the frequency range can be enlarged. The same effect can also be obtained by giving the masking characteristic curve  $\alpha 13$  an offset instead of weighting.

In the same way, with regard to the minimum limit of audibility characteristics, the minimum limit of audibility characteristic curve  $\alpha 1$  through  $\alpha 4$ , which is based on the aural-psychological characteristics of persons with typical hearing characteristics, can be weighted or given an offset, thereby changing the  $\alpha 4$  portion of the curve, for example, as shown by reference symbol  $\alpha 5$ . In this way, relatively more bits are allocated to the high-frequency bands.

Next, processing for allocation of quantized bits will be explained, referring to Figure 3. First, in Step p1, the spectrum power  $S_i$  of each frequency band is calculated from the sum of squares of the MDCT coefficients for that frequency band (which are obtained by means of the MDCT processing). In Step p2, the audio compression circuit 6 selects, through the register 36a of the system control microcomputer 36, parameters for change of masking characteristics, such as the variables  $k$ , which are stored in the table ROM 6a. In Step p3, in the same way as in Step p2, parameters for change of the minimum limit of audibility characteristics are selected.

In Step p4, reference masking characteristics and minimum limit of audibility characteristics previously calculated and stored in the table ROM 6a are changed in accordance with the parameters selected in Steps p2 and p3, and these two characteristics are synthesized in order to determine a final masking threshold. In other words, if the minimum limit of audibility characteristic curve thus changed is as shown by the reference symbols  $\alpha 1$ ,  $\alpha 2$ ,  $\alpha 3$ ,  $\alpha 5$ , and the masking characteristic curve thus changed is as shown by the reference symbols  $\alpha 11$ ,  $\alpha 12$ ,  $\alpha 14$ , the curve of the final masking threshold obtained by synthesis will be as shown by the reference symbols  $\alpha 1$ ,  $\alpha 12$ ,  $\alpha 14$ ,  $\alpha 3$ ,  $\alpha 5$ .

In Step p5, if the index of each frequency band is  $i$ , the ratio of the frequency band's spectrum power  $S_i$  (calculated in Step p1) to its masking threshold  $M_i$  (calculated in Step p4)  $SMR_i = S_i/M_i$  is calculated for all frequency bands. On a logarithmic graph, the ratio  $SMR_i$  for each frequency band will correspond to that

part of the length of the spectrum power  $S_i$  which exceeds the masking threshold  $M_i$ .

Next, in Step p6, the ratio of spectrum power  $S_i$  to the power of quantized noise  $N_i(n)$ , when the spectrum power  $S_i$  of each frequency band is quantized into  $n$  bits, is calculated:  $SNR(n) = S_i/N_i(n)$ . Statistically, the ratio  $SNR(n)$  is a constant in accordance with the characteristics of the signal, so it may be calculated in advance by statistical processing. From the ratio of the ratio  $SNR(n)$  to the ratio  $SMR_i$  can be calculated the ratio of masking threshold to the power of quantized noise, being  $MNR_i(n) = SNR(n)/SMR_i$ .

In Step p7, the quantized bits are allocated to each frequency band as follows. The number of bits  $n$  is increased from 0, and, at each increase, the ratio of masking threshold to power of quantized noise  $MNR_i(n)$  is calculated for each frequency band, and a bit is allocated to the frequency band where the ratio  $MNR_i(n)$  is the smallest. In this way, each time the number of quantized bits  $n$  is increased, a bit is allocated to the frequency band with the smallest ratio  $MNR_i(n)$ , and if this is repeated until allocation of all available bits is completed, the word length of each frequency band is determined, and this is outputted. In other words, bits are allocated starting with the frequency band in which the length of that part of the spectrum power  $S_i$  exceeding the threshold  $M_i$  is longest.

Thus, bits are allocated in such a way that the masking threshold, as shown in Figure 1, is changed to accord with the listener's preference.

The foregoing has described the case of change of both the masking characteristics and the minimum limit of audibility characteristics, but the present invention is not limited to such a case; either the masking characteristics or the minimum-audibility characteristics may be changed alone.

In short, change of the minimum limit of audibility characteristics alone, for example, makes it possible to select whether or not to allocate bits to small spectra in the inaudible range or spectra in the ultra-low or ultra-high ranges. Again, change of the masking characteristics only, since it entails change of masking characteristics which are determined by the critical bands in accordance with the power and the frequency of each frequency band, makes it possible to select whether or not to allocate bits to spectra which are masked by spectra with comparatively high power. In this way, sound quality which accords with the hearing of each listener can be obtained.

The second embodiment of the present invention will be explained below, in reference to Figure 4.

Figure 4 is a flow chart for explaining the bit allocation method in the second embodiment of the present invention. The notable feature of this bit allocation method is that it is possible to set a desired percentage  $x$  between (a) the bit allocation according to the ratio of masking threshold to quantized noise  $MNR_i(n)$  and (b) the bit allocation according to the power of quantized

noise  $S_{Ni}(n)$ , when the spectrum power  $S_i$ , which is a representative value of the power or energy of each frequency band, is quantized into  $n$  bits. Several of the percentages  $x$  of (a) to (b) are stored in advance in the table ROM 6a of the audio compression circuit 6, and selection among the different percentages  $x$  can be performed, through the register 36a of the system control microcomputer 36, in response to the operations from the input operating means 37.

In concrete terms, first, in Step p11, in the same way as in Step p1 in the first embodiment, the spectrum power  $S_i$  of each frequency band is calculated from the sum of squares of the respective MDCT coefficients. In Step p12, the value in the register 36a of the system control microcomputer 36 is read, and the corresponding percentage  $x\%$  is selected from the table ROM 6a.

If the percentage  $x$  determined in this way is 0, i.e., when the number of bits  $B_1$  available for the first allocation is 0, then the bit allocation according to the ratio of masking threshold to quantized noise will not be performed, and the processing proceeds directly to Step p18, which will be discussed below. In contrast, if the number of bits  $B_1$  available for the first allocation is not 0, then Step p13 is carried out.

In Step p13, given a total number of mini-disc audio spectrum data bits  $B_0$  (1,144 to 1,464 bits), the number of bits  $B_1$  available for the first allocation in accordance with the ratio  $MNR_i(n)$  is calculated:  $B_1 = B_0 \times (x/100)$ .

In Step p14, in accordance with previously-calculated masking characteristics and minimum limit of audibility characteristics corresponding to the aural-psychological characteristics of persons with typical hearing, a masking threshold, i.e., the curve  $\alpha_1$ ,  $\alpha_{12}$ ,  $\alpha_{13}$ ,  $\alpha_3$ ,  $\alpha_4$ , is calculated. Then, in Steps p15 and p16, as in Steps p5 and p6 above, the ratio of masking threshold to power of quantized noise  $MNR_i(n)$  for each frequency band is calculated from the ratio  $SMR_i$  of the frequency band's spectrum power  $S_i$  to its masking threshold  $M_i$ . In Step p17, bit allocation is performed in the same way as in Step p7 above, but the total number of bits allocated in Step p17 is the number of bits available for the first allocation  $B_1$ , as calculated in Step p12 above.

In Step p18, the power of quantized noise  $S_{Ni}(n)$  is calculated, and in Step p19, bits are allocated to the frequency band with the highest power of quantized noise  $S_{Ni}(n)$ . Thereafter, the power of quantized noise  $S_{Ni}(n)$  is re-calculated, bits are allocated to the band where this value is highest, and this is repeated until all bits available for the second allocation  $B_2 = B_0 (1 - (x/100))$  have been allocated. Steps p18 and p19 are carried out when the number of bits available for the first allocation is 0 and the processing has proceeded directly from Step p12 to Step p18, or when  $x$  does not equal 100, but when  $x$  does equal 100, i.e., when  $B_2 = 0$ , the word-length is outputted directly after Step p17.

In cases when the input signal is a composite wave of a sine wave signal and white noise, and in other

cases where it resembles a single sine wave, for example with a solo piano piece, if the bit allocation is performed only according to the ratio of masking threshold to quantized noise  $MNRi(n)$ , many bits will be allocated to noise elements with low power, and the error in quantizing of the piano becomes relatively great. However, if the bit allocation percentage  $x$  can be changed as outlined above, the bit allocation according to the power of quantized noise  $SNi(n)$  is carried out in addition to that according to the ratio of masking threshold to quantized noise  $MNRi(n)$ , thereby ensuring that the number of bits allocated to the piano can be increased, the error in quantizing of the piano is reduced.

Again, if the input signal is composed of sound with many local peaks and noise, for example an orchestra piece, the bit allocation can be performed in accordance with the ratio of masking threshold to quantized noise  $MNRi(n)$ , in which the noise and the musical tones composing small local peaks in bands close to large signals can be masked, thus allocating no bits to them, and more bits can be allocated to large signals which are not masked. This enables high fidelity recording.

Further, with input signals lying between the foregoing two examples, which are composed of a musical tone with three or four local peaks and noise, for example a solo clarinet piece, by giving weight both to the bit allocation according to the ratio of masking threshold to quantized noise  $MNRi(n)$  and to the bit allocation according to the power of quantized noise  $SNi(n)$ , fidelity of the clarinet can be improved.

In this way, the bit allocation method most suited to any musical tone source can be selected.

The third embodiment of the present invention will next be explained, in reference to Figures 5 and 6.

Figure 5 is a flow chart for explaining the bit allocation method in the third embodiment of the present invention. The notable feature of this bit allocation method is that the percentage  $x$  of (a) the bit allocation according to the ratio of masking threshold to quantized noise  $MNRi(n)$  to (b) the bit allocation according to the power of quantized noise  $SNi(n)$  is automatically determined on the basis of the relationship between (1) peaks and local peaks in spectrum powers  $Si$  and (2) masking thresholds.

First, the peak value among the spectrum powers of all frequency bands from  $S1$  to  $Si$ , such as that shown by reference symbol  $S5$  on Figure 6, is found. Then a masking threshold, such as that shown on Figure 6, which includes masking characteristics due to that peak level, is found. Next, local peaks such as that shown by reference symbol  $S8$  on Figure 6 are found for each frequency band. The number of such local peaks masked by the masking threshold, and the number of such local peaks not so masked, are respectively found, and the ratio between masked local peaks and unmasked local peaks determines the percentage  $x$ .

In other words, if the total number of local peaks is  $NM$ , and the number of masked local peaks is  $M$ , then:

$$M/(NM+1) = 0 \quad (1)$$

Accordingly, if there are no masked local peaks, the percentage  $x$  will be 0%, and the number of bits available for the first allocation  $B1$  will be set at 0. If, on the other hand,

$$0 < M/(NM+1) < 0.5 \quad (2)$$

then  $x$  is from 50% to 90%, and if

$$0.5 < M/(NM+1) \quad (3)$$

then  $x$  is 100%, and the number of bits available for the first allocation  $B1$  will be the entirety of total available bits  $B0$ .

Here the detection of local peaks and the selection of the percentage  $x$  will be discussed. The local peaks are found for all the frequency bands after the peak spectrum power ( $S5$  in Figure 6) is found. In the example in Figure 6, the difference  $D34, D45, \dots, D89$  and its polarity between each spectrum power  $S3$  to  $S9$  within a certain number of frequency bands from peak value  $S5$  (in the example in Figure 6, two frequency bands on the low-frequency side and four on the high-frequency side) is found, and the local peaks are detected on the basis of change in polarity and the absolute value of those differences. In this way, the local peaks are found across all frequency bands. In concrete terms, in the case of Figure 6, there is only one local peak ( $S8$ ), and that local peak is masked by the masking threshold; thus  $M/(NM+1) = 1/(1+1) = 0.5$ . Accordingly, equation (2) above will be applied, and a percentage  $x = 50\%$  to  $90\%$  will be selected.

Next, the bit allocation method of the third embodiment will be explained in reference to Figure 5.

In this bit allocation method, after the spectrum power  $Si$  of each frequency band has been calculated in Step p21 as in Step p11 and Step p1 above, the peak value is found in Step p22, and the masking threshold including the masking characteristics of that peak value is found in Step p23. In Step p24, the percentage  $x$  is calculated by means of equations (1) through (3) above, and the number of bits available for the first allocation  $B1$  is calculated. Then, in Steps p25 through p27, as in Steps p15 through p17 above, the first bit allocation, according to the ratio of masking threshold to quantized noise  $MNRi(n)$ , is performed, and then in Steps p28 and p29, as in Steps p18 and p19 above, the second bit allocation, according to the power of quantized noise  $SNi(n)$ , is performed.

In this way, a bit allocation with high sound quality appropriate to the musical tones like that shown in Figure 4 can be performed automatically, and deterioration of sound quality, even with respect to musical tones not suited to the bit allocation according to the ratio of masking threshold to quantized noise  $MNRi(n)$ , can be prevented.

The foregoing explains the case in which the percentage  $x$  is calculated by means of equations (1) through (3) above (the preferred case), but the present invention need not be limited to this case. A similar effect may be obtained by calculation of the percentage  $x$  by means of equations (1) and (3).

The change of the minimum limit of audibility and/or masking characteristics shown in Figures 1 and 3 above may also be applied to the bit allocations shown in Figures 4 and 5.

The concrete embodiments and examples of implementation discussed in the foregoing detailed explanations of the present invention serve solely to illustrate the technical details of this invention, and the present invention should not be narrowly interpreted within the limits of such concrete examples, but rather may be applied in many variations without departing from the spirit of this invention and the scope of the patent claims set forth below.

#### Claims

1. A method of encoding digital data comprising the steps of:

(a) converting the digital data into a frequency spectrum, and dividing the frequency spectrum into a plurality of frequency bands;  
 (b) changing a minimum limit of audibility characteristic among aural-psychological characteristics so as to set a masking threshold;  
 (c) finding a ratio of masking threshold to noise for each frequency band, based on power or energy of each frequency band; and  
 (d) allocating a number of quantized bits to each frequency band in accordance with the ratio of masking threshold to noise.

2. The method of encoding digital data according to Claim 1, wherein:

in said steps (c) and (d), the number of the quantized bits is increased incrementally from 0, and, at each increase, the ratio of masking threshold to noise is found for each frequency band, and bits are allocated to a frequency band having the smallest ratio of masking threshold to noise.

3. A method of encoding digital data comprising the steps of:

(a) converting the digital data into a frequency spectrum, and dividing the frequency spectrum into a plurality of frequency bands;  
 (b) changing a masking characteristic among aural-psychological characteristics so as to set a masking threshold;

(c) finding the ratio of masking threshold to noise for each frequency band, based on power or energy of each frequency band; and  
 (d) allocating a number of quantized bits to each frequency band in accordance with the ratio of masking threshold to noise.

4. The method of encoding digital data according to Claim 3, wherein:

in said step (b), after change of the masking characteristic, the minimum limit of audibility characteristic among aural-psychological characteristics is changed so as to set the masking threshold.

5. The method of encoding digital data according to Claim 3, wherein:

in said steps (c) and (d), the number of the quantized bits is increased incrementally from 0, and, at each increase, the ratio of masking threshold to noise is found for each frequency band, and bits are allocated to a frequency band having the smallest ratio of masking threshold to noise.

6. The method of encoding digital data according to Claim 4, wherein:

in said steps (c) and (d), the number of the quantized bits is increased incrementally from 0, and, at each increase, the ratio of masking threshold to noise is found for each frequency band, and bits are allocated to a frequency band having the smallest ratio of masking threshold to noise.

7. A method of encoding digital data in which the digital data is converted into a frequency spectrum, the frequency spectrum is divided into frequency bands, and quantized bits are allocated to each frequency band, said method comprising the steps of:

setting a percentage for allocation of the quantized bits, the percentage being changeable; and

(i) performing a first allocation of the quantized bits in accordance with ratios of masking threshold to noise which are found for each frequency band in accordance with power or energy of each frequency band in consideration of aural-psychological characteristics; and  
 (ii) performing a second allocation of the quantized bits in accordance with a representative value of the power or energy of



each frequency band;

wherein said steps (i) and (ii) are performed in accordance with the percentage so as to allocate the total number of quantized bits, thereby allocating the number of the quantized bits of each frequency band.

8. The method of encoding digital data according to Claim 7, wherein:

the percentage is determined in accordance with a relationship between the masking threshold and peaks and local peaks found based on differences in power or energy between adjacent spectra within each frequency band.

9. The method of encoding digital data according to Claim 7, wherein:

the percentage corresponds, if NM is the total number of the local peaks, with a ratio of the number M of the local peaks which are masked by the masking threshold to the number N of the local peaks which are not masked by the masking threshold.

10. The method of encoding digital data according to Claim 9, wherein:

the percentage is set to 0% when  $M/(NM+1) = 0$  is satisfied; and the percentage is set to 100% when  $0.5 < M/(NM+1)$  is satisfied.

11. A method of encoding digital data in which, in converting digital data such as musical tones and sounds into frequency domains, dividing the converted spectra into a plurality of frequency bands, and allocating bits for each frequency band so as to encode the digital data, the allocating of bits is performed in accordance with a ratio of masking threshold to noise of each frequency band in consideration of aural-psychological characteristics, the ratio being calculated for each frequency band in accordance with power or energy of each frequency band, wherein:

minimum limit of audibility characteristics that have been previously found are changeable.

12. A method of encoding digital data in which, in converting digital data such as musical tones and sounds into frequency domains, dividing the converted spectra into a plurality of frequency bands, and allocating bits for each frequency band so as to encode the digital data, the allocating of bits is per-

formed in accordance with a ratio of masking threshold to noise of each frequency band in consideration of aural-psychological characteristics, the ratio being calculated for each frequency band in accordance with power or energy of each frequency band, wherein:

masking characteristics that have been previously found in accordance with the power or the energy are changeable.

13. A method of encoding digital in which digital data such as musical tones and sounds is converted into frequency domains, the converted spectra are divided into a plurality of frequency bands, and bits are allocated for each frequency band so as to perform the encoding, said method comprising the steps of:

(i) performing a first allocation of the quantized bits in accordance with ratios of masking threshold to noise which are found for each frequency band in accordance with power or energy of each frequency band;

(ii) performing a second allocation of the quantized bits in accordance with a representative value of the power or the energy of each frequency band; and

(iii) performing a third allocation of the quantized bits giving weight to the bit allocation methods of each of said steps (i) and (ii);

wherein said steps (i), (ii), and (iii) are switchable.

14. The method of encoding digital data according to Claim 13, wherein:

said steps (i), (ii), and (iii) are switched in accordance with a relationship between the masking threshold and peaks and local peaks found based on differences in power or energy between adjacent spectra within each frequency band.

FIG. 1

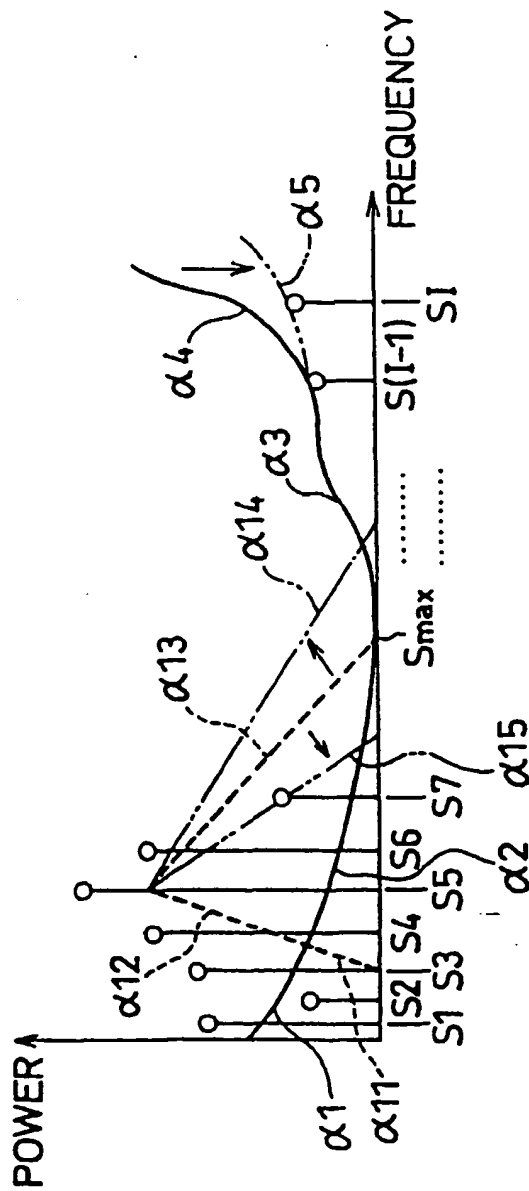


FIG. 2

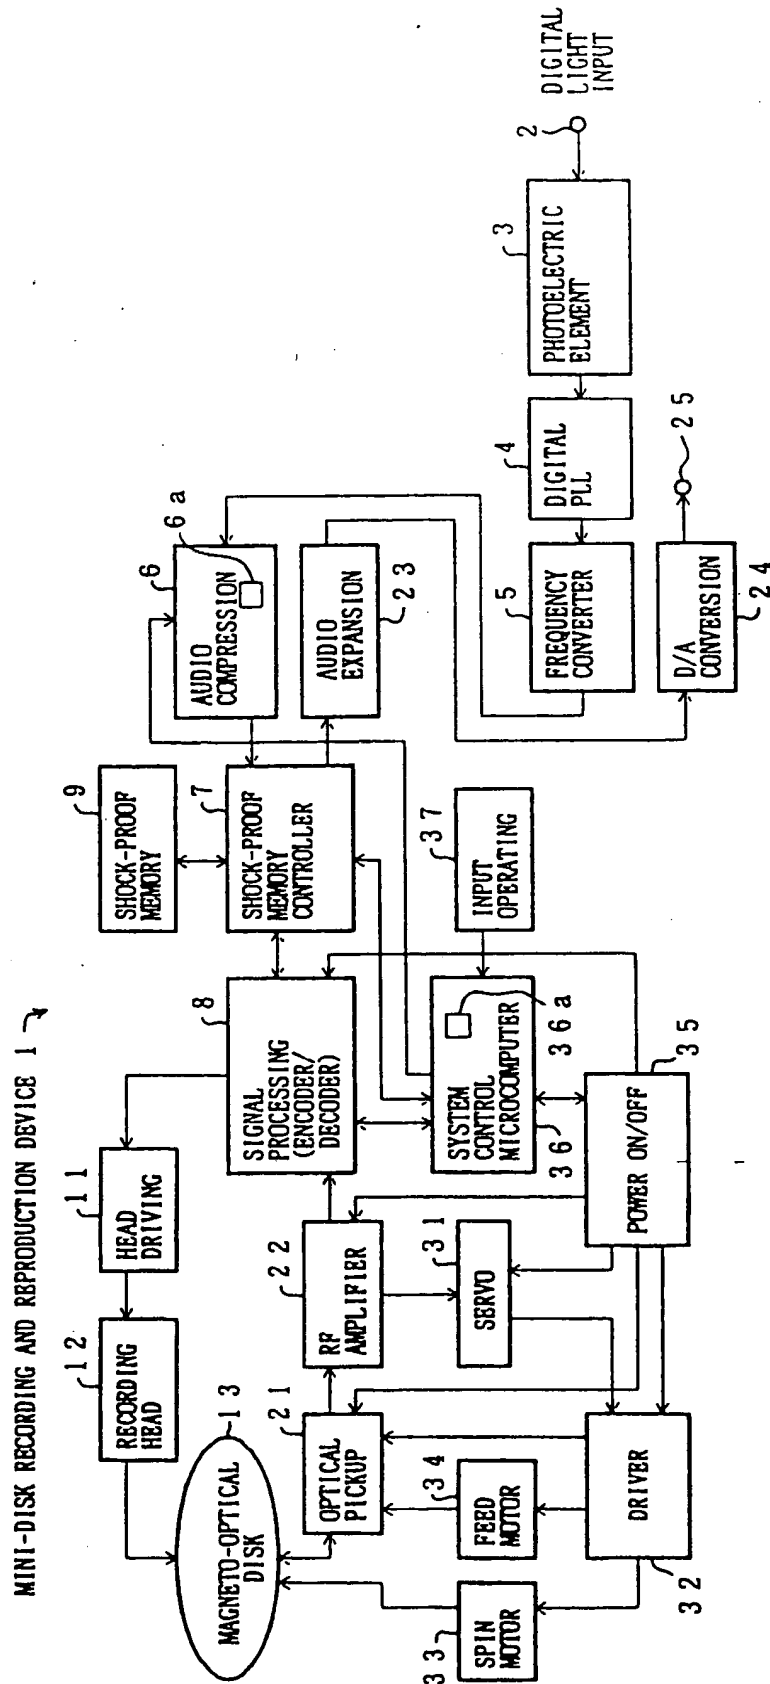


FIG. 3

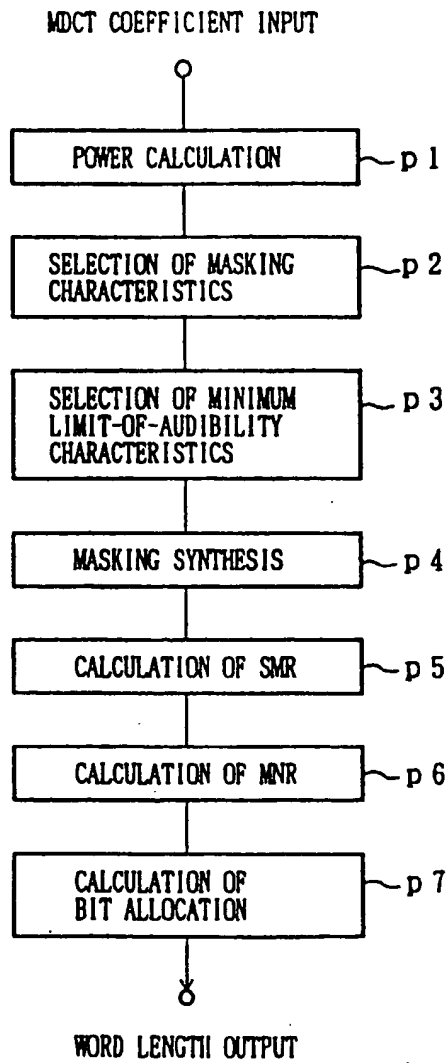


FIG. 4

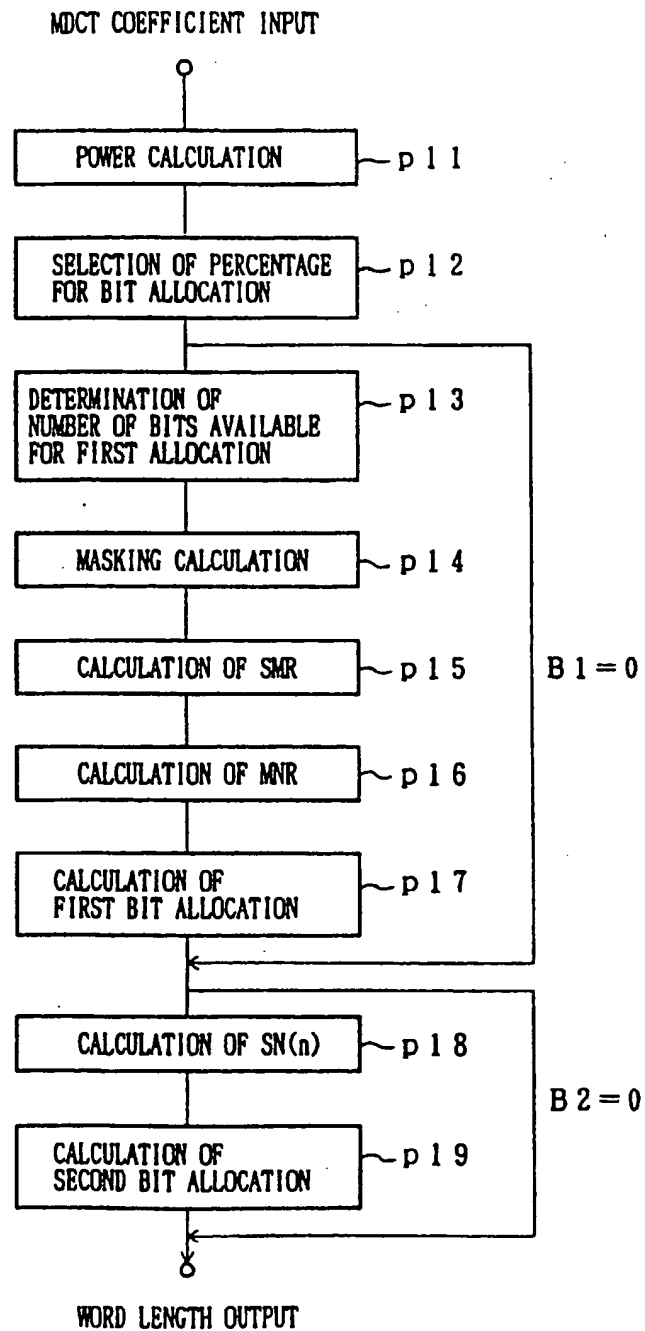


FIG. 5


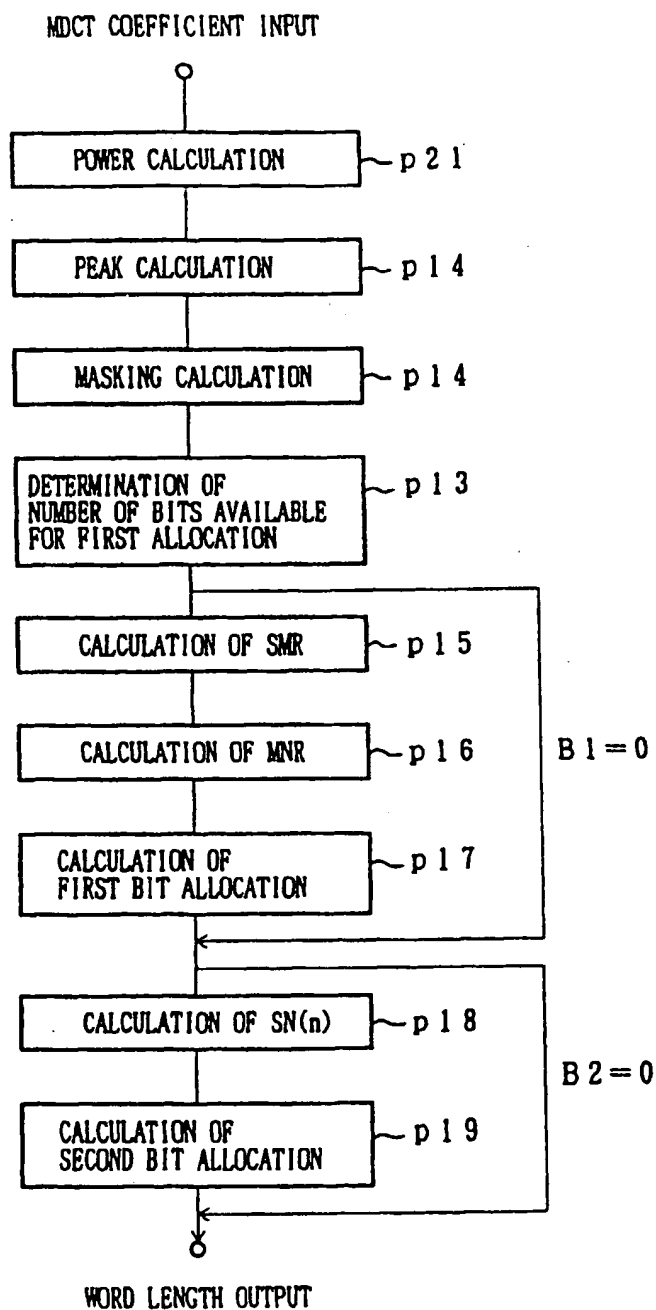


FIG. 6





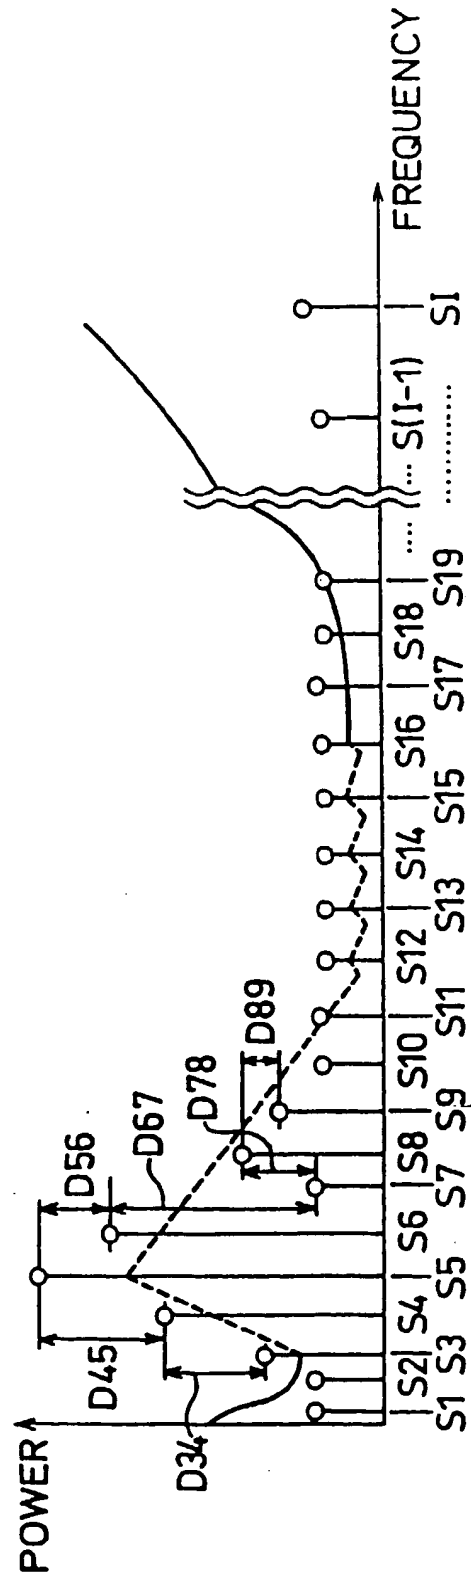

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 855 805 A3

(12)

## EUROPEAN PATENT APPLICATION

(88) Date of publication A3:  
19.04.2000 Bulletin 2000/16

(51) Int. Cl.<sup>7</sup>: H04B 1/66

(43) Date of publication A2:  
29.07.1998 Bulletin 1998/31

(21) Application number: 97310098.5

(22) Date of filing: 15.12.1997

(84) Designated Contracting States:  
AT BE CH DE DK ES FI FR GB GR IE IT LI LU MC  
NL PT SE

Designated Extension States:  
AL LT LV MK RO SI

(30) Priority: 22.01.1997 JP 960597

(71) Applicant:  
SHARP KABUSHIKI KAISHA  
Osaka-shi, Osaka-fu 545-0013 (JP)


(72) Inventor: Fujii, Osamu  
Higashihiroshima-shi, Hiroshima 739-01 (JP)

(74) Representative:  
Abble, Andrew Kenneth et al  
R.G.C. Jenkins & Co.  
26 Caxton Street  
London SW1H 0RJ (GB)

### (54) Method of encoding digital audio signals

(57) The method of encoding digital data in the present invention enables change of minimum limit of audibility characteristics and/or masking characteristics, which are usually set on the basis of the aural-psychological characteristics of persons with typical hearing, thus changing the allocation of quantized bits to each frequency band and allowing selection of a sound quality which accords with the listener's hearing. The present invention is suitable for ATRAC, a method for compressed encoding for mini-discs.

FIG. 1

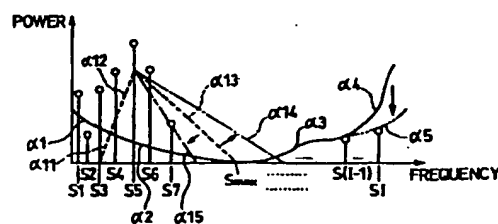

EP 0 855 805 A3



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 97 31 0098

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
X	EP 0 661 821 A (SHARP KK) 5 July 1995 (1995-07-05)	1,3,11	H04B1/66
A	* figure 1 *	2,4-10, 12-14	
	* abstract *		
	* column 2, line 42 - column 3, line 55 *		
	* column 4, line 5 - line 15 *		
	* column 15, line 52 - column 17, line 8; figure 18 *		
	* column 27, line 4 - line 20 *		
	* claim 1 *		
A	EP 0 570 131 A (SONY CORP) 18 November 1993 (1993-11-18)	1-14	
	* abstract *		
	* column 3, line 51 - column 4, line 11 *		
	* column 11, line 27 - line 38 *		
	* claims 9-11 *		
A	EP 0 612 160 A (MATSUSHITA ELECTRIC IND CO LTD) 24 August 1994 (1994-08-24)	1-14	
	* page 4, line 10 - line 28 *		
	* page 5, line 25 - line 28 *		
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
			H04B
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>29 February 2000</b>	Examiner <b>Ó Donnabháin, E</b>
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 (03.02) (P04021)

ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.

EP 97 31 0098

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

29-02-2000

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0661821 A	05-07-1995	JP 7202823 A	04-08-1995
		DE 69418994 D	15-07-1999
		DE 69418994 T	02-12-1995
		US 5684922 A	04-11-1997
EP 0570131 A	18-11-1993	JP 5313694 A	26-11-1993
		DE 69325312 D	22-07-1999
		DE 69325312 T	16-12-1999
		US 5553193 A	03-09-1996
EP 0612160 A	24-08-1994	JP 6242798 A	02-09-1994

EPO FORM P459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☒ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☐ **FADED TEXT OR DRAWING**

☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**